




OPENING WINDOW AND DOOR SYSTEM WITH THERMAL BREAK



ELEGANT STRAIGHT OR CURVED LINE SOLUTIONS WITH 60 mm STRAIGHT LINE WIDTH OR 67.5 mm CURVED LINE WIDTH

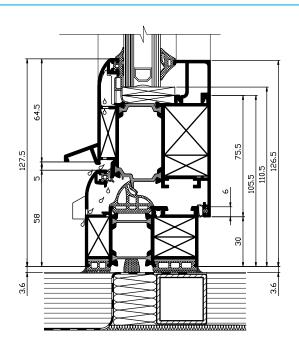



FEATURES

Uw= 1.2 W/m²K

Sashes for PVC hardware which enable: multiple locks, hinges adjustment and fast installation EPDM gasket for superior thermal insulation, drainage and air impermeability Double glazing from 18 mm up to 49 mm

Hidden vent solution



DETAILS

DESIGN

NEW ELEGANT SERIES WITH CONCEALED SASH

MULTIPLE VARIATIONS OF DOOR FINISHING AT FLOOR LEVEL


COMPLEMENTORY PROFILES ENABLING A WIDE RANGE OF CONFIGURATIONS

Optimized for the highest structural stability whilst using a lower amount of aluminium content

Profile reinforcement at load bearing points

Opening elements - opening at vertical axis, tilt and turn, opening at top or bottom horizontal axes, folding doors, parallel sliding

Reliable horizontal and vertical mechanisms

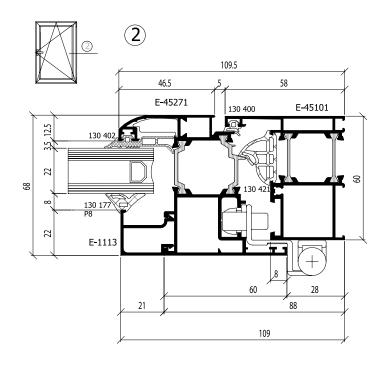

etem.com